

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
11 November 2004 (11.11.2004)


PCT

(10) International Publication Number  
**WO 2004/097451 A1**

- (51) International Patent Classification<sup>7</sup>: **G01S 7/292**, 13/90
- (74) Agent: **MOLKER, Anders**; c/o Ericsson AB, Patent Unit Radio Networks, S-431 84 Mölndal (SE).
- (21) International Application Number: **PCT/SE2004/000654**
- (22) International Filing Date: **26 April 2004 (26.04.2004)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data: **0301231-7** **25 April 2003 (25.04.2003)** **SE**
- (71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET LM ERICSSON (publ)** [SE/SE]; S-164 83 Stockholm (SE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **HELLSTEN, Hans** [SE/SE]; Mutebo Aspnäs, S-585 97 Linköping (SE).

[Continued on next page]

(54) Title: **RFI SUPPRESSION IN SAR**

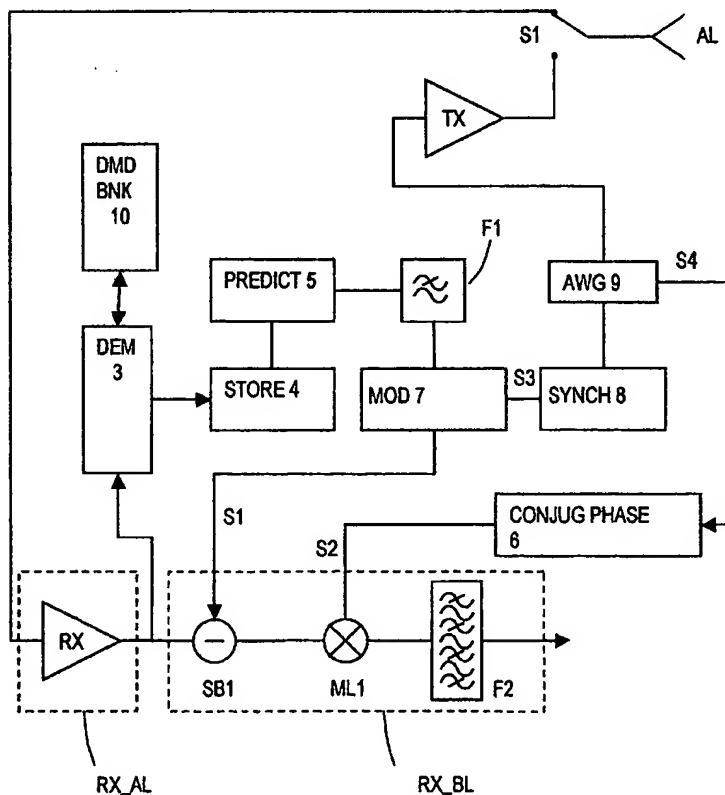

(57) Abstract: A filter scheme for broadcast interference cancellation that is computationally efficient and numerically robust Airborne Low Frequency Synthetic Aperture Radar (SAR) operating in the VHF and UHF bands has been shown. At least interference Doppler filtering or interference cancellation is utilised. The interference cancellation involves prediction of the interference for each particular reception interval of mixed interference and radar ground response. This prediction is then coherently subtracted from the incoming signal.

WO 2004/097451 A1

WO 2004/097451 A1



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

Published:

— with international search report

RFI suppression in SAR

JC20 Rec'd PCT/PTO 27 SEP 2005

## Field of the invention

- 5 This invention relates to the field of radar systems co-existing with radio signals for audio and video. More particularly, the present invention relates to the field of synthetic aperture radar, SAR, operating in the VHF/UHF range.

Background of the invention

10

Due to technology limitations, early radar development had to rely on the HF/VHF/UHF bands. The ever-increasing demand for frequency bands for radio use has forced some radar applications out of the lower bands.

- 15 However, the VHF/UHF bands remain attractive even today where microwave technology makes it feasible to operate in high frequency spectra.

- Airborne Low Frequency Synthetic Aperture Radar operating in the VHF and UHF bands is becoming an important emerging technology for wide area surveillance and target de-  
20 tection in foliage. A VHF synthetic aperture radar system denoted CARABAS™ (trade mark?) (Coherent All Radio Band Sensing) SAR system has been described in US-4965582 and US4868446. An ultra wide band coherent radar system has been disclosed US-6072420.

- 25 To obtain sufficient resolution, viz. a few meters or less, the radar-operating band must extend over several tens of Megahertz, i.e. radar reception must be wide band and occur across frequency bands allocated for radio and TV broadcasting.

- The development of airborne multi-octave foliage penetration radars in the VHF and  
30 UHF band renews the discussion on how radar and radio can co-exist in the same frequency band. The cohabitation issue is particularly pronounced with television broadcast due to its need for a large bandwidth.

- Consider a VHF radar operating in an area of broadcast transmission. Given that radar  
35 transmit power is significantly below that of the commercial broadcast station, the operating range of television broadcast stations and the radar emission is of the same order

of magnitude and finally that the television subscribers have directional antennas pointing at the broadcast station, the absolute majority of subscribers will receive a television signal, which dominates over the interference from the radar transmitter with respect to power level. The radar receiver on the other hand will sense a one-way propagation  
 5 television interference signal, dominating strongly over the backscattered radar signal.

The fidelity of analogue television colour reception calls for a very good signal to noise ratio, enabling typically phase representation to within 0.5 deg. This would require 40 dB SNR. Assuming  $PG = 1$  MW (given directivity of television transmitter and receiver antenna),  $\lambda = 5$  m and  $r = 100$  km one finds  
 10

$$P_{TV \rightarrow TV} = PG \frac{\lambda^2}{(4\pi)^2 r^2} = -18 \text{ dBm}$$

$$B_{TV} = 5 \text{ MHz}$$

Exterior noise at VHF may be 40 dB above thermal noise, viz for

$$P_e = F_e kTB = -70 \text{ dBm}$$

15 we find that 40 dB SNR gives a 10 dB margin to exterior additive noise. The cited figures seem characteristic of good receiving conditions and thus the expectation that possible interference from radar should not affect TV reception quality.

Now, consider interference caused by 20 – 90 MHz VHF SAR operating on an aircraft at  
 20 some typical altitude of 10 km. Say that peak radar transmit power is 1 kW. A linear FM transmit waveform thus radiates 1 kW also in the TV band. With a 0 dB transmit gain (typical omni-directional low frequency SAR antenna) and a 10 dB receiver antenna gain we get  $PG = 10$  kW and one has

$$P_{Radar \rightarrow TV} = PG \frac{\lambda^2}{(4\pi)^2 r^2} < -18 \text{ dBm}$$

25 Hence, as a worst case, the radar interference and the useful TV signal are of the same order of magnitude. Using a more advanced radar waveform, in which the TV band transmission is present over the entire length of the radar transmit signal, the peak power in the TV band can be reduced by 10 dB. Still compared to the required TV SNR  
 30 ratio, the interference level remains high.

Another important aspect concerning co-habitation is the radar duty cycle. The peak power figure presumes a relatively large duty cycle – higher than 10%. The relative time under which the TV reception is interfered is thus higher than 1 %, depending on the waveform and to some extent the interference level as a trade-off parameter.

5

TV broadcast antennas are vertically extended in order to depress the transmit signal towards its terrestrial users. For this reason and for the absence of gain in the radar antenna, one may set  $PG = 10$  kW for radar reception of a single TV station. As there may be a number of stations active in the spectrum, as a worst case we assume

10  $PG = 100$  kW and get instead of ()

$$P_{TV \rightarrow radar} = PG \frac{\lambda^2}{(4\pi)^2 r^2} = -28 \text{ dBm}$$

As mentioned exterior noise at VHF may be 40 dB above thermal noise, viz. for

$$B_{radar} = 50 \text{ MHz}$$

15

$$P_e = F_e kTB = -60 \text{ dBm}$$

Given the elevated exterior noise temperature, radar transmit power has to be increased to compensate for this noise. The sited figures for radar transmit power are calculated on this presumption. Giving rise to interference levels for television reception of the same order as the actual television signal they can hardly be increased. Hence the 30 dB noise figure of television interference has to be mitigated by other means.

20

The suppression depth of the mitigation step must consequently be 30 dB. There are several basic mitigation techniques

25

1. Range spectrum band-pass filtering
2. Doppler spectrum filtering
3. Cancellation

30

The first method implemented by narrow-band notching techniques that can be analogue pre-reception has been explored in connection with the VHF radar work done in Sweden. This option is only feasible if at least the partial band 20 – 50 MHz is free from TV-interference (?). Removing a significant part of the radar spectrum leads to production of sidelobes, which severely degrades radar performance.

The second method is normally associated with the possibility of removing carrier waves, letting the radar operate coherently in slow time by digital post-reception carrier cancellation techniques. Removal of carrier waves is considered inefficient since in the matched filtering performed by the SAR-processing, the carrier signal combines with its modulation leading to an overall increase in the noise floor.

The third method of cancellation presumes that, the TV signal by some means can be identified and subsequently subtracted from the combined radar/television signal. Active noise cancellation is known in the audio field in which ambient noise is recorded and a mirror signals is processed, amplified generated by means of a loudspeaker. The mirror signal is generated in a timely and accurate fashion so as to cancel the noise at a given point. Since the TV signal has many degrees of freedom, and the required cancellation depth is significant, it is doubtful if such a cancellation can be successful in practice. Even the much simpler case of cancelling a pure carrier is by experience a delicate matter.

#### Summary of the invention

It is a first object of the invention to set forth a radar system in which VHF and UHF band communication signals, e.g. radio and TV signals, are actively suppressed, so as to enable the radar system be used in areas where such signals are prevalent.

Moreover it is a first object of the invention to reduce radar interference on communication services such as audio and television reception. Although the radar signal power received at the television receiver may only give rise to a small interference content, this may still be unacceptable. Hence, it is an object of the invention to mitigate the very energy dominating interference of television broadcast on radar reception. On the other hand, mitigating the disadvantageous effects on radar must occur without requiring increased radar transmit power, which would aggravate television reception.

Radar is a device for range or distance measurements relying on electromagnetic echoes. By accurate timing of the interval from the moment of transmission of electromagnetic pulse until the subsequent return of the echo, the distance to the object giving rise to echo is estimated, making the fundamental assumption that the pulse propagates to the object and back linearly and uniformly at the known speed of light. The accuracy of

the range measurement is set by the timing accuracy ultimately limited by the bandwidth and energy of the pulse.

5 The last statement is particularly noteworthy, viz. that it is the bandwidth and energy and not the detailed shape of the pulse, which sets the range resolution. Thus a transmit radar pulse can have a long duration (much longer than the timing accuracy for the echo), and thus convey a large energy, at the same time spanning bandwidth which provides a high range accuracy.

10 For signals of a duration larger than the timing accuracy, range determination is achieved by signal processing the received signal through a transmit signal matched filter, so-called "pulse compression". The filter can be realised in both the Fourier domain and the time-domain. In the time domain, such a filter is a correlation between the transmit and receive signal. In the Fourier domain, the filter consists of multiplying the  
15 Fourier transform of the received signal with the complex conjugate of the Fourier transform of the transmitted signal. The outcome of this filter is a reflectivity function providing the radar reflectivity as a function of range.

In the particular application of synthetic aperture radar – SAR – the reflectivity is the  
20 mean reflectivity of the illuminated ground along circular arcs limited by the radar antenna angular resolution. This mean reflectivity is greatly improved by the SAR principle repeating the measurement for different positions of the SAR platform, moving over the illuminated ground.

25 Consider now radar operation, spanning over a band, which encompasses one or several TV broadcast bands. This situation occurs for instance in VHF SAR, operating over may be 70 MHz of bandwidth in which one or several TV stations operating across some 5 MHz bandwidth may radiate into the radar antenna. The TV signals are very strong compared to the received radar signal and must in some way be rejected out of the collected data in order that this will represent the ground reflectivity and thus transform into  
30 a good SAR image of the ground.

Consider first that no TV broadcast is present. According to what have been stated one may alter the transmit signal from pulse to pulse preserving the bandwidth and the energy of the pulse. This will not affect the reflectivity function determined by pulse com-  
35

pression. Thus, in SAR for instance, one may change the transmitted signal in this way without affecting the SAR image.

According to a first aspect of the invention, the pulse compression is changed from PRF pulse to PRF pulse.

In the case of TV broadcast, the received radar signal will also contain TV signals from the one or several bands encompassed by the radar band. The analogue TV signals, it is noted, consists to a large degree of repetitive messages, viz. each TV frame is quite similar to the next one for intervals of a second or more, and an TV line will therefore be similar to the corresponding TV line in the next frame and so on for maybe 50 frames (the frame rate is about 50 Hz). It is clear that if the radar signal was transmitted in synchronism with the TV frames, the pulse compression signal processing will preserve quasi-periodicity of the TV signal. After some second of radar operation and data collection, the TV signal will thus appear in the received pulse compressed Fourier transformed data as a pin spectrum with 50 Hz separation between pins and may be 1 Hz width of each pin. It will be possible to reject TV signal by applying a comb filter in the Fourier domain.

According to a second aspect of the invention, the radar signal is operated in synchronisation with a given TV signal and filtering is applied for rejecting the TV signal content.

As mentioned above, such rejection principle requires the radar to operate in synchronism with the TV frame rate. One possibility to achieve synchronisation with the TV signal would be to adapt the radar transmit pulse repetition frequency – PRF - so that very precisely each radar transmission would occupy a very precise location in TV frame received onboard the radar platform. In practise, however we may encounter several stations in which frame synchronism may not be precisely upheld. In fact the motion of a SAR platform would by itself induce a frequency shift (Doppler shift) dependent on the relative location of TV transmitter, which prevents a PRF synchronous to all received TV bands.

It is noted that a variable PRF is a mere special case of allowing the transmit signal shape to vary from pulse to pulse. As already pointed out, this can be done without affecting the radar signal. Such variation may however not only be variable delay corre-



sponding to varying PRF but may provide the required synchronism to several TV bands within the transmitted radar band. We now describe how this can be achieved.

The waveform universally used in combination with pulse compression is so-called linear  
5 FM, in which a linear frequency modulation is exploited throughout the transmit interval. At a large FM rate a certain frequency within the radar signal spectrum is reached soon after the onset of transmission, at a small FM-rate this instance occurs later. Rather than using a linear FM-signal one can thus exploit a non-linear signal, which reaches a certain set of predetermined frequencies within the radar spectrum at certain pre-  
10 determined times. This non-linear FM signal would consist of linear components, which however are temporally disjunct and add to form the overall signal. Clearly for this reason such a non-linear FM-signal will act well as a transmit signal.

This type of non-linear FM-signal is directly suitable for the discussed purpose of estab-  
15 lishing synchronism to the TV frame rate. In fact the PRF rate suitable for VHF SAR operation is of the order 1 kHz, which means that the transmit signal is of a duration shorter than 1 millisecond. For this type of signal to establish synchronism with one or several 50 Hz references (the frame rates of different TV bands encountered) would only require minor adjustments of the FM frame rates and is certainly without any effect on radar per-  
20 formance whatsoever.

According to a third aspect of the invention, the radar transmit signal is formed as a pulse compressed signal whose characteristic is constituted by segments of linear FM. Moreover, the pulse compression transmit signal is arranged such that for a given TV  
25 channel frequency, the time between the radar pulses coinciding in frequency with the TV signal is an integer divisor to the TV frame period. In this manner the radar interference shows as a constant area in the TV picture over time.

More preferably, the radar signal corresponds advantageously to an equal complete  
30 number of TV lines. In so far more channels are present in the radar range, the linear segments are arranged such, that the above criteria applies for all TV channels.

Practically, the type of ever changing transmit signal required can be obtained by modern arbitrary waveform generator – AWG - technique in which it is possible to update the  
35 AWG memory at very rates consistent with the PRF-rate. Hence the required adaptation

of transmit signal waveform is predicted by a computation based on the received and demodulated TV-signals and the computed data used to update the AWG.

According to a fourth aspect of the invention, the received radar signal is improved by  
5 predicting a TV signal operating in the radar range. The radar signal reception is improved by subtracting the predicted TV interference signal from the received signal.

It is found that there is an important orthogonality aspect of radar and broadcast transmit signals, which may support their cohabitation: The information in a radar signal (giving  
10 the position of radar transmitter) is intrinsic in its spatial covariance properties whereas the communication message in a broadcast signal is coded in its temporal covariance properties.

In effect, the radar transmit signal may change randomly from pulse to pulse without affecting its usefulness for the radar application, whereas a communication signal may  
15 change randomly from location to location without spoiling its information carrying property. To the latter statement there are two snags. For one, channel equalisation has to be established so that the stationary transfer characteristics of the reception on any site are compensated for. Secondly, if interference comes from a moving radar, transfer  
20 properties will change in time, albeit perhaps more slowly than the de-correlation time of the transferred message. If so, channel equalisation will still be possible.

For a broadcast signal – which is intended for human reception in real-time - there must be an attribute of permanency. Indeed, an audio message must remain stationary for  
25 tens of seconds in order to allow a listener to interpret it. A moving image must remain correlated for maybe a second for its contents to be understood.

Accordingly, for each frequency (i.e. TV program) in the broadcast band, the radar transmission adopts the phase and amplitude of the broadcast signal to be expected incident  
30 on the radar at the particular time this particular frequency is passed in the transmit chirp. Accordingly, the radar will transmit a copy of the broadcast message and the broadcast reception site will receive two superimposed but time translated (?) versions of the same message. To a TV subscriber, the reception will appear as a broadcast signal that has been made subject to multipath propagation. In principle – as will be discussed –  
35 so-called channel equalisation may bring back the broadcast signal to its original state.

As for the interference of the broadcast signal on radar reception, its effect is - if the radar transmit signal successfully imitates the broadcast signal - that it will be stationary on pulse compression. In fact, since pulse compression consists of correlating the transmitted signal to the received signal, it will in effect contain the correlation  $f(t, \tau)$  between two segments of the broadcast signal separated by fast time  $\tau$  and the development of this correlation in pulse-to-pulse time viz. slow time  $t$ . Clearly, if the broadcast signal tends to remain correlated over extended periods in slow time,  $f(t, \tau)$  will tend to remain constant in slow time. Thereby, its spectral support in the Doppler domain will be small. As will be seen, its spread in Doppler may indeed be much smaller than the SAR Doppler bandwidth and broadcast interference may be mitigated by bandpass filtering in the Doppler domain.

The filtering according to the invention accomplishes a reduction of interference energy by the order of 40 dB. It is thereby on parity with the stochastic noise component, which by its nature cannot be removed from the received signal. Consequently, the degrading effect of radio interference on SAR imagery might be substantially removed.

Further advantages will appear from the following detailed description of the invention.

#### Brief description of the drawings

Fig. 1 shows a first embodiment of the radar system according to the invention,

25

Fig. 1\_1 shows a second embodiment of the radar system according to the invention,

Fig. 1\_2 shows a third embodiment of the radar system according to the invention,

Fig. 2+3 shows the embodiment of fig. 1 implemented in a VHF/UHF SAR system comprising two bar antennas,

30

Fig. 4 shows a Fourier transform of the radar signal (after node F2 in fig. 1\_1) of the radar signal under strong RFI interference,

35

Fig. 5 shows the effects of the adaptively filtered radar signal according to the invention on a first TV picture signal,

Fig. 6 shows the effects of the adaptively filtered radar signal according to the invention on a second TV picture signal seconds after the signal shown in fig. 5, and

Fig. 7 shows a preferred embodiment of the pulse compression according to the invention operating in synchronisation with a TV signal.

10

#### Detailed description of preferred embodiments of the invention

Moving imagery displays both spatial and temporal redundancies, enabling if one wish significant data compression. Unlike the situation for digital video, no utilisation of this possibility is made in analogue video. The spatial redundancy is associated with the psychological fact that in order to be perceived by humans, a video image may only consist of a limited number of spatial features. Hence, for most parts in a video sequence, any given excerpt of a TV line in a particular frame decays (i.e. change colour along the line) only slowly along the line. Similarly, it is likely that such a part of a TV line will be strongly correlated to the corresponding parts in subsequent lines (i.e. temporal correlated). The temporal redundancy consists of that given part of an image in subsequent frames that are likely to be strongly correlated. In particular there may appear a strong correlation between subsequent frames of the "scene content" of a TV image since it remains relatively constant, cf. fig. 5 and 6, only interrupted by sudden "scene changes" of a duration of a second or longer.

In fig. 1, the radar system according to the invention comprises an aerial AL, an input / output switch SW1, a receiving amplifier RX, a demodulator 3 working according to usual demodulation principles for the given communication signal prevailing, a demodulation bank 10 containing frequencies and demodulation forms pertaining to given communication signals prevailing in a given geographical range of interest. According to one embodiment of the invention the demodulation bank and the demodulator corresponds to a usual TV tuner.

35

In the embodiment shown in fig. 1, there is moreover provided a first input switch S1, an attenuator 14 and a second input switch 15. The receiver captures radio interference frames, a sequence of which is exploited to predict the interference component of the combined signal of interference and radar response.

5

The radar system moreover comprises, a storing unit 4, a prediction unit 5, a filter F1, a modulation unit 7 working according to known modulation forms pertaining to given communication signals at given frequencies, a synchronisation unit 8. In the most simple form, the prediction unit 5, simply repeats the last received picture.

10

The modulation unit 7 produces a modulated signal, which is a prediction of the next TV frame in the time domain.

According to a preferred embodiment shown in fig. 1 and also in fig. 1\_2, the signal of the modulation unit 7, S1, is subtracted from the received combined radar / interference signal in subtract node SB1 to separate the radar data. In this manner, the received signal is enhanced and the RFI interference is suppressed. The possibility of this scheme relies on the low pass filtering of the predicted interference signal. Because of this, radar data, which are added to interference and subsequently subtracted, are first filtered to below a few Hertz of Doppler bandwidth, viz. to the band, which anyway will be notched in the subsequent 2-dimensional filtering (explained in connection with fig. 3). The radar system moreover comprises an arbitrary wave generating (AWG) unit 9, a transmit amplifier TXL and a 2-dimensional filter (shown in fig. 3). The generator is operated in synchronisation with the predicted interference signal, such as a TV signal.

25

The arbitrary wave generator 9 is adapted for generating an arbitrary transmit wave at periodical interruptions at a given PRF frequency, e.g. at 30KHz. The outputted signal may moreover be subject to pulse compression. Under pulse compression, which is well known in the art, the frequency of the transmitted pulse is increased at a constant rate (Chirp). In the receiver it is introduced in a linear filter that decreases linearly with frequency at the same rate (conjugate filter characteristic) as the transmitted signal. The matched filtering scheme effect is that the received pulse.

30

According to a second embodiment of the invention, a subtraction unit 12 and a phase conjugate unit 6 are provided. The conjugate phase unit 6 is conjugate to the transmit

35

pulse compression filter used in arbitrary wave-guide generator AWG 9. The arbitrary wave generator 9 is of a standard type used for instance in coherent VHF SAR.

5 According to the second embodiment of the invention, the pulse segments are established, by means of synchronisation unit 8 and arbitrary waveform generator 9 for each PRF pulse in a manner, which shall be explained in connection with fig. 7. As mentioned above, since the filtering used in arbitrary waveform generator and in conjugate phase unit 6 are conjugate, according to principles known from pulse compression, the signal can be rendered arbitrary without influencing radar operation. This embodiment is further  
10 emphasized in the fig. 1\_1 embodiment.

The coherency of the interference may be used to separate it from the radar ground response, in which case the interference signal can be registered essentially continuously. In this scheme, in the demodulation of the interference, the radar response will appear  
15 as additional noise, which will be weak compared to the interference. It would thus not upset the interference demodulation scheme or the derived phase estimate.

According to a preferred embodiment of the invention, - by predicting the broadcast signal (repeating at least parts of it) according to the known modulation technique pertaining to a given channel - the (return of the) transmit radar waveform, transmitted in each  
20 PRF pulse, is modified or adapted to be synchronised with the broadcast TV signals incident on the radar at the moment of transmission.

In fig. 4, the effects of a typical TV signal in the filter F2 in the radar unit is shown. It  
25 shows a relatively constant peak amplitude at around 0 Hz (30) corresponding to the frame-to-frame stability of 50Hz and the line-to-line stability of 350 Hz (31). The intermediate peaks vary along the variations in the information content. The level of the radar signal is below the level indicated by line 33.

30 In fig. 5 and 6, which relates to two subsequent analogue TV pictures, the influence of the modified radar pulses according to the invention on the TV pictures have been shown. It appears that the radar influence on the TV signal constitutes the same area in the TV picture. The (phase of the) radar signal is synchronous with the TV frame periodicity. The frame-to-frame correlation could typically amount to 0.02s - 1s. The radar  
35 signal is adapted in such a way that a vertical "band" appearing on the screen occupies the same position on the screen over time. Moreover, preferably the radar interference

on the television signal according to the invention with the line periodicity of the television picture signal. The line-to-line correlation of the radar signal could range between 0.1 ms – 0.01s.

5 As mentioned above, since the nature of the television signal is such that the information content relating to the same area of the screen is often constant over periods of time, the radar signal can be predicted successfully, simply by repeating the "information content" associated with the given area in question based on a reception of the last picture received. Accordingly since the radar signal imitates the television signal, the television  
10 signal is inflicting a minor influence on the radar reception and is hence rendered to co-exist with the television signal. Likewise, the radar signal is inflicting only minor effects on TV reception.

In fig. 2 and 3 an implementation of the circuit shown in fig. 1 has been shown in more  
15 detail. Fig. 2 and 3 relates to a coherent synthetic aperture radar system, denoted Coherent All Radio Band Sensing (CARABAS), of which type for instance has been described in US-4866446. The system comprises two bar antennas, AL and AR, mounted on a flying vehicle parallel to the direction of flight for scanning the ground to the left and the right side of the vehicle. The circuit of fig. 1 is provided in both left and right channels  
20 as illustrated by fig. 2 and 3.

As illustrated in fig. 2, the "left" side circuit RX\_AL comprises an input filter F4..., amplifier RX, Analogue/ Digital converter, ADC, buffer BFF, first Fast Fourier Transform unit FFT and Right /Left separation step1.

25

As shown in fig. 3, the left side circuit RX\_AL moreover comprises, as mentioned above subtracting unit SB1, multiplication unit ML1, corner turn unit CRN\_TRN, second Fast Fourier Transform unit , FFT2, filter F2, second corner turn unit CRN\_TRN2, second right left separation step R/L\_SEP2, inverse fast Fourier transform unit IFFT and  
30 FFB\_SAR unit providing a digital output for further data processing of radar data, such as presentation of SAR data.

In fig. 7, the manner of adapting the radar pulses in order to bring them into synchronisation with the TV signal is shown in a schematic example, where a given TV channel  
35 is transmitted at 60 MHz. A first PRF pulse C1 is transmitted at a given linear chirp rate.

For the subsequent PRF pulse, the pulse compression is arranged as two linear segments C2A and C2B such that for the frequency 60 Mhz, the time between the PRF pulse – or the phase – are in synchronisation with the periodicity, K, of the TV picture frames. Thereby, the major spikes of TV interference shown in fig. 4, can be filtered in a  
5 comb filter.

It should be understood that even though one major source of radio interference has been dealt with – namely analogue TV broadcasts – the invention is applicable to other types of radio interference. One may also encounter digital modulation systems. In e.g.  
10 OFDM – orthogonal frequency division multiplexing - the TV signal is de-multiplexed into – for VHF – 6000 channels, each holding a 64 place complex amplitude for 1 ms. The amplitudes are read off and put into an IFFT turning them into a time message of 6 MHz bandwidth and 1 ms duration at any suitable carrier frequency. Clearly there is no difference in principle between this modulation and analogue modulation as regards the pos-  
15 sibility of interference prediction, but possibly for the fact that for OFDM the exact key to the modulation must be at hand and cannot be “guessed”.



Claims

1. Radar unit comprising  
an antenna, an arbitrary waveform generator (AWG 9) issuing a an arbitrary (peri-  
5 odic) radar waveform signal at a given pulse repetition frequency (PRF), the AWG  
unit being adapted for adjusting the phase of the radar waveform signal as a func-  
tion of a phase adjustment signal,  
  
a transmit amplifier (TX) coupled to the antenna,  
10  
  
a receive unit (RX) coupled to the antenna,  
  
a 2D filter for generating associate values of radar response and coordinate data,  
15  
  
at least a noise prediction means coupled the receiver for receiving at least one  
prevalent radio frequency interference (RFI),  
  
a demodulation and decoding bank (10) comprising known information on the  
modulation and coding principle of the prevalent RFI signal, the RFI signal typically  
20 operating according to a predetermined refresh frequency at which redundant in-  
formation is repeated (50Hz),  
  
the noise prediction means (3, 4, 5, F1, 7, 12 ) receiving, demodulating and decod-  
ing the information content of the at least one RFI signal.  
25
2. Radar system according to claim 1, wherein  
  
the noise prediction means generating a phase adjustment signal (S3) effecting  
30 that the arbitrary radar waveform signal is changed such that for a given RFI signal  
the phase of the radar signal is synchronous with the periodicity of the RFI signal.
3. Radar unit according to claim 1, wherein  
35  
  
the predicted RFI signal is subtracted from the combined radar and RFI signal.

- 5     4.     Radar unit according to claim 2, wherein the frequency spectrum is divided into a plurality of sub-channels, each sub-channel corresponding to a regulatory radio channel used for one radio or television information source, the radar unit comprising a noise prediction means for each RFI sub-channel overlapping with the radar range.

10

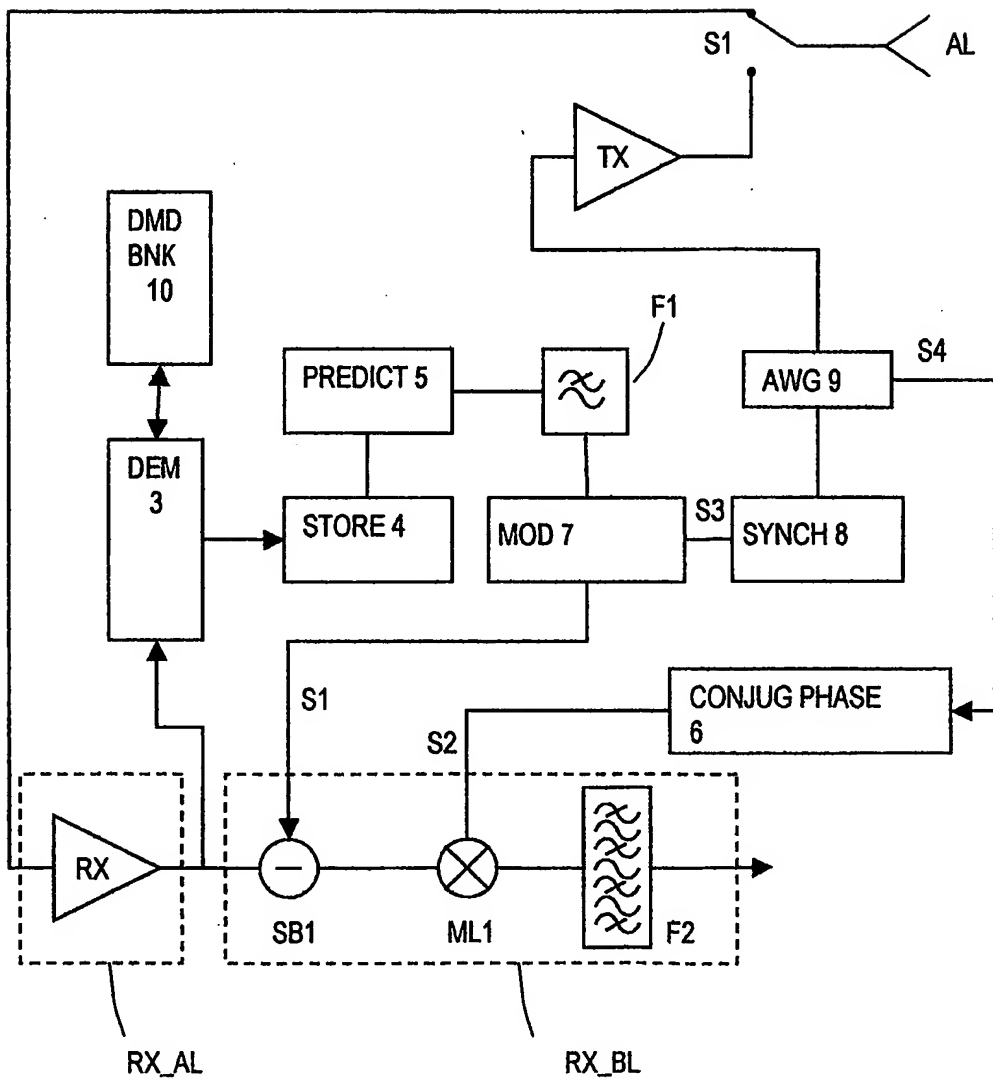


FIG. 1

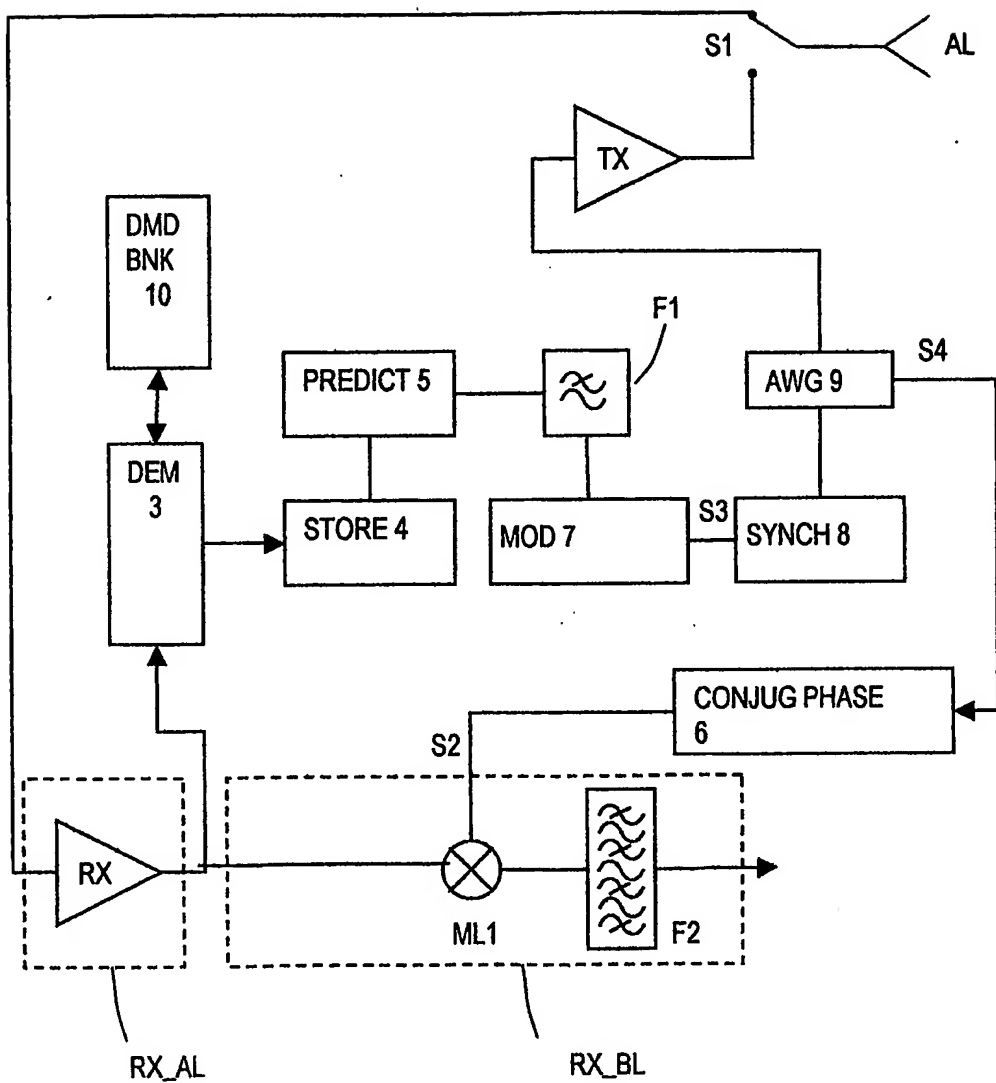


FIG. 1\_1

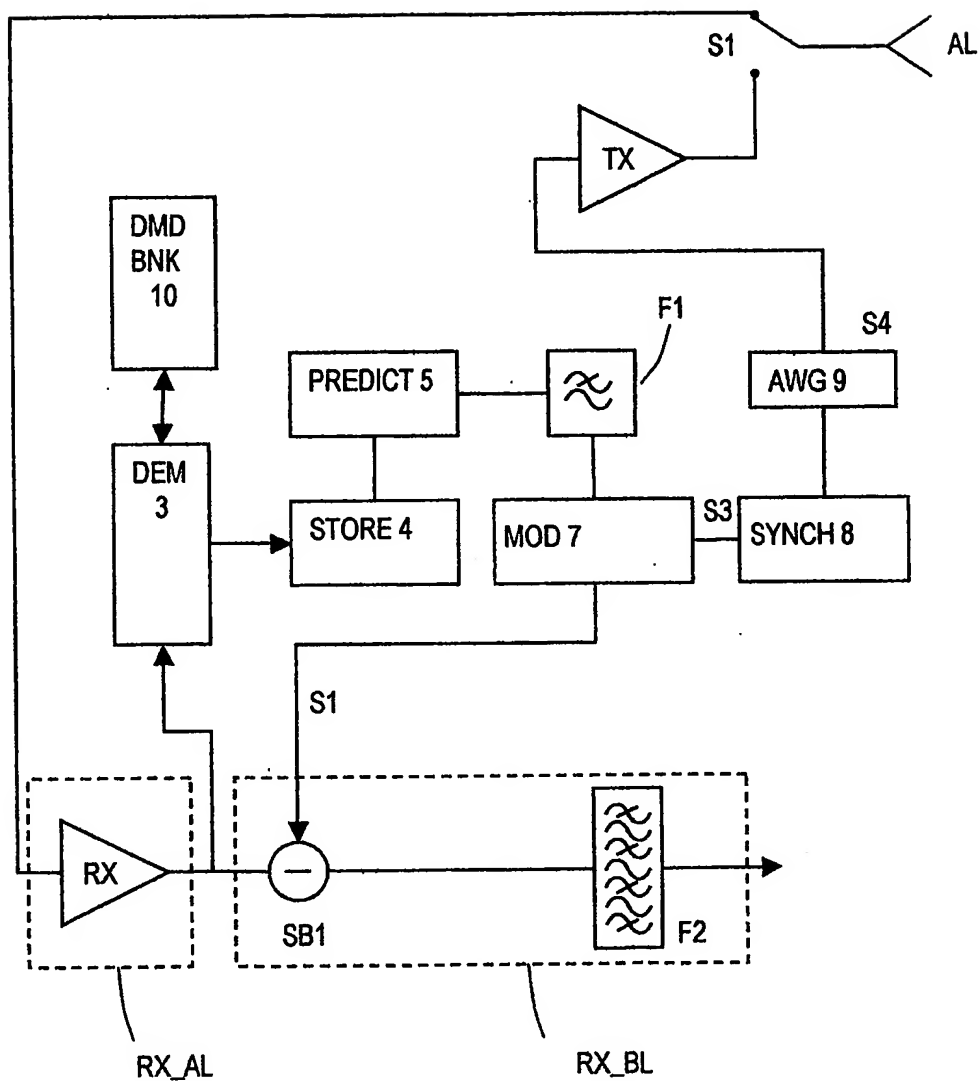


FIG. 1\_2

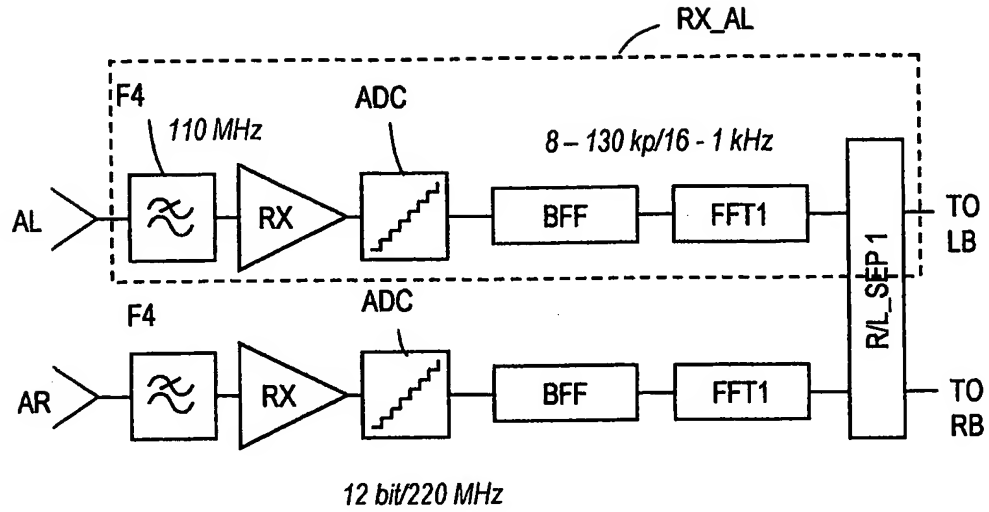


FIG. 2

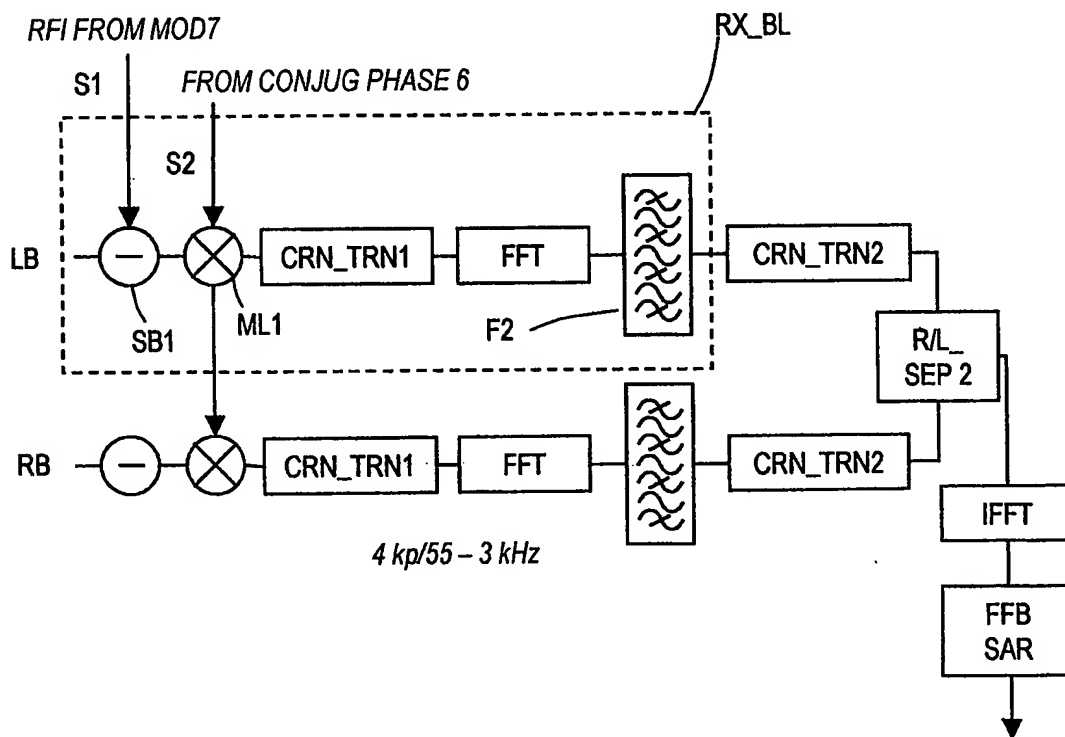


FIG. 3

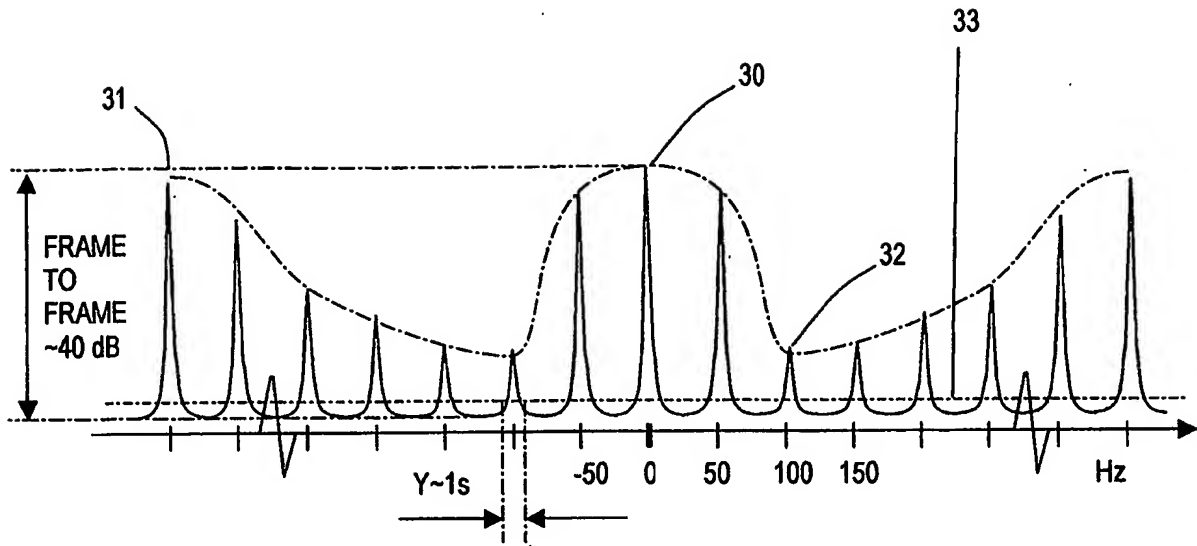


FIG. 4

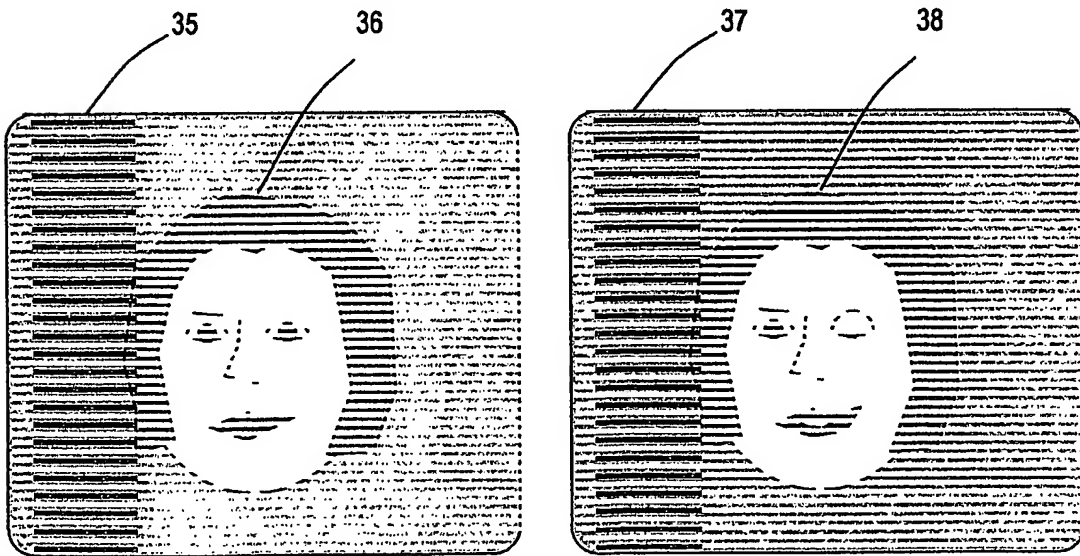


FIG. 5

FIG. 6

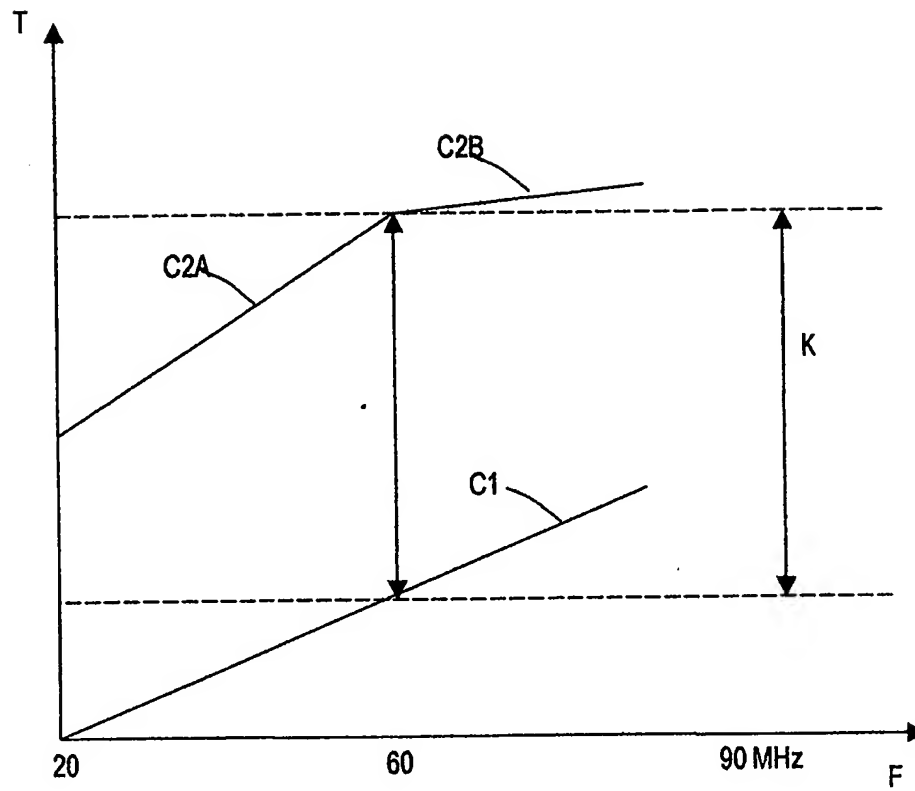


FIG. 7



## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/000654

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: G01S 7/292, G01S 13/90

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: G01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5546085 A (J.A.GARNAAT ET AL), 13 August 1996 (13.08.1996), column 4, line 38 - column 5, line 6, figure 1, abstract --	1-4
Y	Lord R. et al ` Approaches to RF interference suppression VHF/UHF synthetic aperture radar' In:COMSIG 98. Proceedings of the 1998 South African Symposium on Communications and Signals Processing, 7-8 Sept 1998, pp 95-100, Chapter I,II and III A. --	1-4
A	US 6166678 A (J.K.JAO), 26 December 2000 (26.12.2000), column 1, line 66 - column 2, line 56, figures 3,8 --	1-4

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

27 July 2004

Date of mailing of the international search report

29 -07- 2004

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Göran Magnusson /itw

Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**

International application No.

**PCT/SE 2004/000654**

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6028549 A (S.BUCKREUSS ET AL), 22 February 2000 (22.02.2000), abstract  -----	1-4

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

30/04/2004

International application No.

PCT/SE 2004/000654

US	5546085	A	13/08/1996	NONE		
US	6166678	A	26/12/2000	NONE		
US	6028549	A	22/02/2000	DE	19822957 C	25/05/2000